



## Roofing Division

### Rafter Ventilators

**1** Continuous Roll Ventilator  
RV300  
RV450  
RV600  
RV900

Cross Flow Eaves Ventilators  
EV400  
EV600

Cross Flow Eaves Ventilators with strengthening ribs  
RV401  
RV451  
RV601

Cross Flow Eaves Ventilators with strengthening ribs and insect screen (for open soffit)  
RV401F  
RV451F  
RV601F

Cross Flow Eaves Ventilator with strengthening ribs (higher airflow)  
RV625

RV625F with insect screen

Refurbishment Rafter Ventilator  
RV635  
RV655

**2**

---

### Fascia Ventilators

**3** FV100  
10mm airflow

FV250  
25mm airflow

### Soffit Ventilators

**4** SV604  
10mm airflow

SV604E  
with expansion joint

SV606 10mm airflow,  
for sloping soffits

SV609  
25mm airflow

**Single soffit vents**  
Suitable for refurbishment

Spring Wing SV120

Twist and Lock  
SV200

### Pipe Adaptors, for use with **5** & **6**

Connect to Flexi Pipe ducting to convert a ventilator into a soil vent pipe or mechanical extract terminal.


GPA Universal Pipe Adaptor

GV110 Pipe Adaptor

SUA Universal Pipe Adaptor

Flexi Pipe

Universal Extension Sleeve  
Always use with G range tile and slate ventilators to ensure a clear air path.

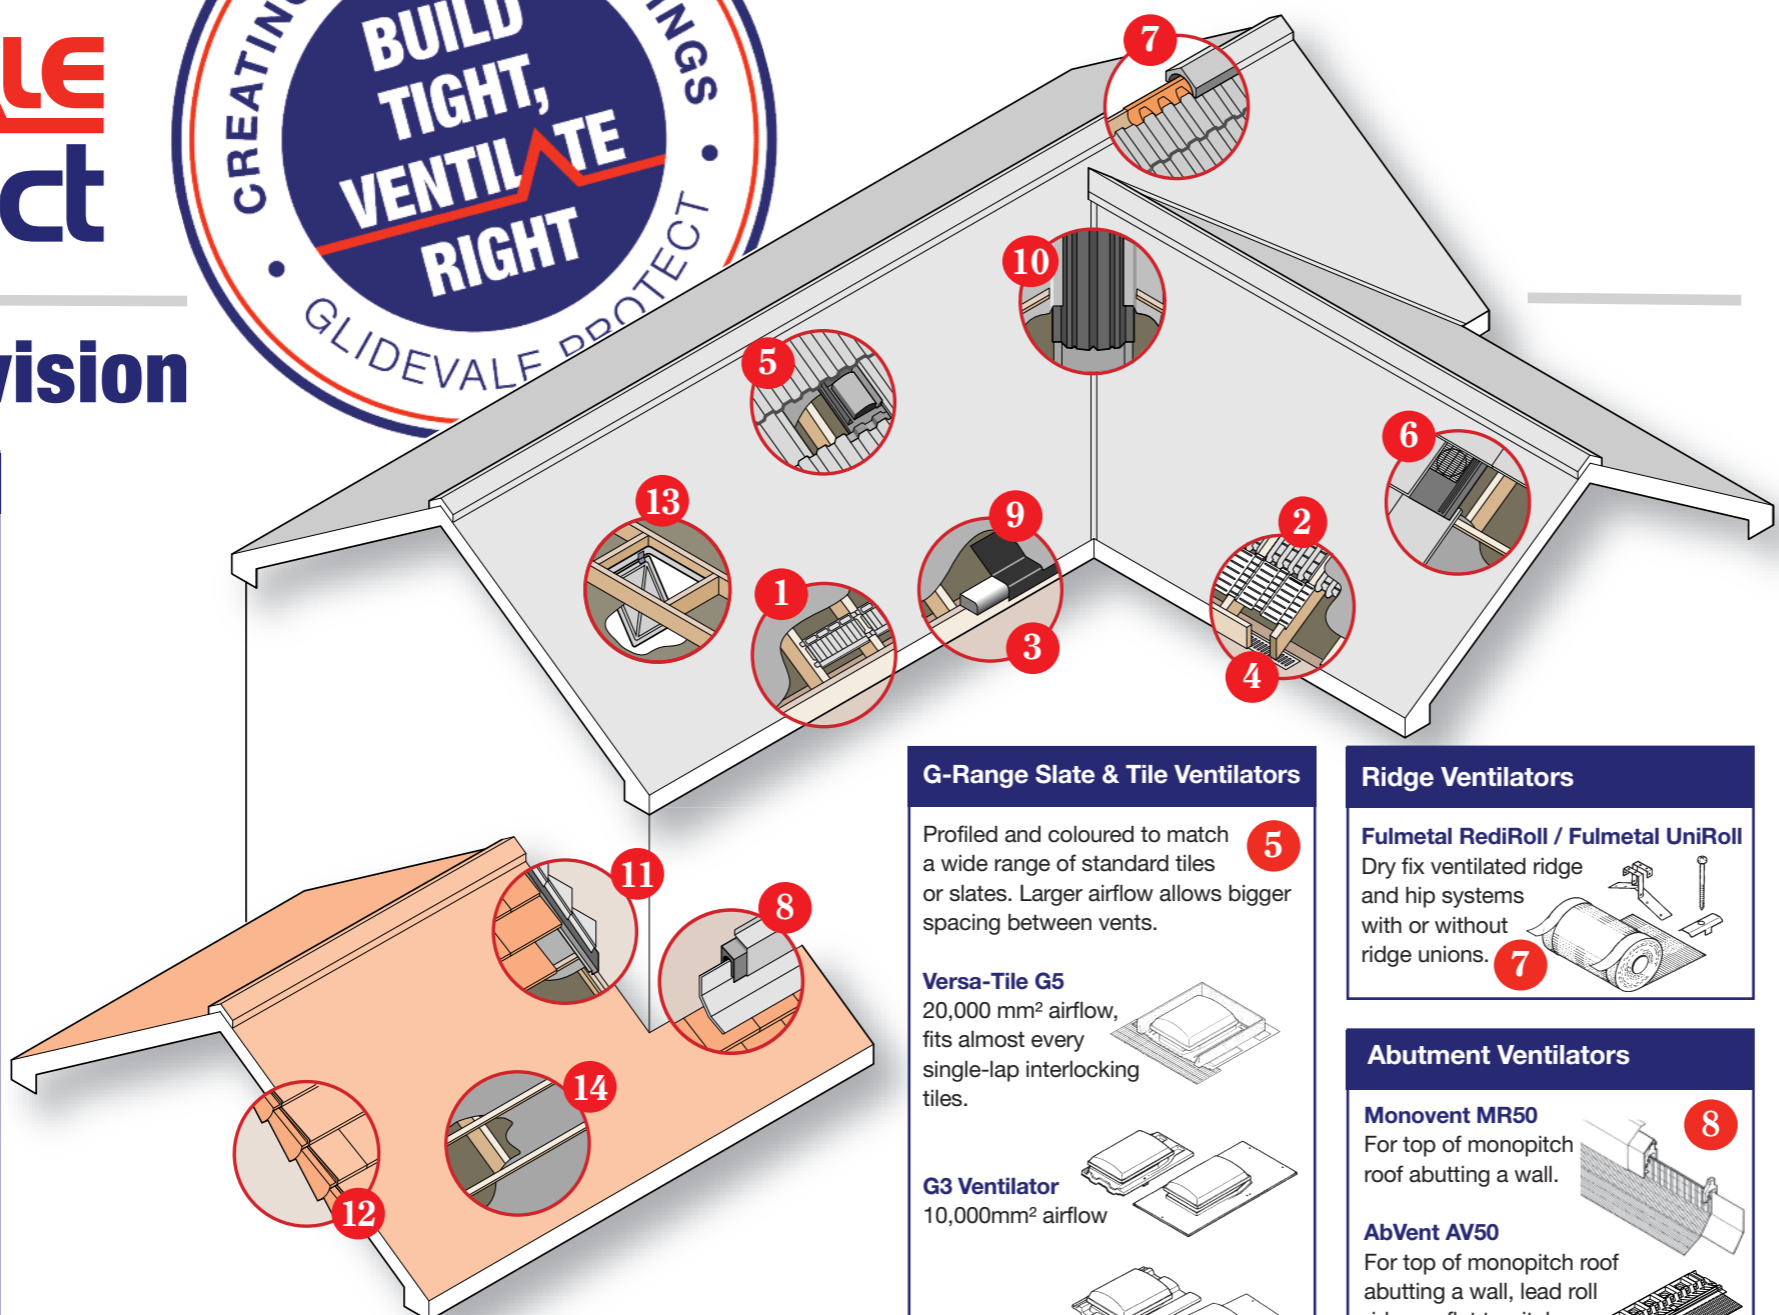

### G-Range Slate & Tile Ventilators

**5** Profiled and coloured to match a wide range of standard tiles or slates. Larger airflow allows bigger spacing between vents.

Versa-Tile G5  
20,000 mm<sup>2</sup> airflow, fits almost every single-lap interlocking tiles.

G3 Ventilator  
10,000mm<sup>2</sup> airflow

G5 Ventilator  
20,000mm<sup>2</sup> airflow

### In-Line Slate & Tile Ventilators

**6** GV11 Compact Universal In-Line Slate Ventilator  
10,000mm<sup>2</sup> airflow

Universal Flat In-Line Interlocking Tile Ventilator  
10,000mm<sup>2</sup> airflow

Universal Interlocking Plain Tile Ventilator  
10,000mm<sup>2</sup> airflow, for use with interlocking plain tiles.

### Ridge Ventilators

**7** Fulmetal RediRoll / Fulmetal UniRoll  
Dry fix ventilated ridge and hip systems with or without ridge unions.

### Abutment Ventilators

**8** Monovent MR50  
For top of monopitch roof abutting a wall.

AbVent AV50  
For top of monopitch roof abutting a wall, lead roll ridge or flat to pitch roof junction.

### Loft Access Hatches\*

**13** Push-up hatches  
AH4  
AH4 Part L  
680 x 520mm

AH7 Part L 1/2 hr Fire Rated  
530 x 530mm

Hinge-down hatches  
AH5  
AH5 Part L  
600 x 520mm

AH6 Part L  
1hr Fire Rated  
540 x 520mm

\* Part of Glidevale Protect's Construction Range

### Roofing Accessories

**9** Eaves  
OFV Eaves Skirt

**10** Dry Valleys  
Universal Dry Fix Valley Trough  
Univalley 125 Valley Trough

**11** Flashings  
AluFlash, environmentally friendly, lead-free flashing (embossed and corrugated options)

**12** Bonding Strips  
For junctions between roofs

Traditional Bonding Strip BS 2X

Universal Bonding Strip

**12** Dry Verge Systems  
Dry Verge DV200 for slate  
Universal Dry Verge for tiles

### Roofing Underlays

Glidevale Protect ventilation products may be required with these underlays in accordance with BS 5250 **14**

#### Vapour Permeable (Type LR) Underlays

For use in cold or warm pitched roofs and reduces the risk of condensation in accordance with BS 5250. Tested in accordance with BS 5534, wind zones applicable to both the UK & Ireland at 345mm batten gauge.

Protect VP200 For wind zones 1-2, (125gsm)

Protect VP300 For wind zones 1-3, (130gsm)

Protect Zytec For wind zones 1-4, (158gsm)

Protect VP400 Plus<sup>LR</sup> For wind zones 1-5, (170gsm)

#### Glidevale Protect Roofing Underlays

- Act as a secondary line of defence against driving rain.
- Offer high performance under wind uplift without need for sealing tapes.
- Act as a temporary roof covering during construction.
- Have a good hydrostatic head of water resistance to ensure strong water tightness properties.

#### Impermeable (Type HR) Underlays

Heavy duty underlays for use in cold or warm pitched roofs. Tested in accordance with BS 5534, wind zones applicable to both the UK & Ireland at 345mm batten gauge.

Protect Wunderlay

Protect A1

Protect A1 T3 Plus

#### Air and Vapour Permeable (Type LR) Underlay

A premium type LR roof underlay with high air and vapour permeability for use in warm and cold pitched roof constructions, helping to avoid the risk of harmful condensation without the need for additional ventilation as permitted by the NHBC for a cold roof construction.

Protect Viking Air For wind zones 1-4, (159gsm)



**Roofing Division**

Roofing Underlays  
Roofing Ventilation  
Roofing Accessories  
Technical Support

**ROOFING UNDERLAYS**

Glidevale Protect offers one of the broadest ranges of pitched roof underlays available from a single manufacturer.

The range includes the following types of underlay which meet wind uplift resistance zones 1-5:

- Vapour permeable
- Impermeable
- Air and vapour permeable



**ROOFING VENTILATION**

Glidevale Protect offers a wide selection of roofing ventilation products suitable for all tile and slate roofs.

As one of the market leaders in tile ventilator manufacture in the UK, Glidevale Protect's range has been collated for almost 40 years and includes hundreds of dedicated profiled tile ventilators matching almost any tile available on the market.

The range includes cowl slate & tile ventilators, in-line slate & tile ventilators, ventilator adapters, rafter ventilators, fascia ventilators and soffit ventilators.



**ROOFING ACCESSORIES**

Glidevale Protect offers a range of roofing accessories for all tile and slate roofs which complement the roofing product portfolio and provide an ideal alternative to traditional products.

The range includes ventilated dry fix ridge & hip systems, dry verge systems, valley troughs, bonding strips, eaves skirt and AluFlash flashing, the environmentally friendly alternative to lead.



**CONSTRUCTION DIVISION**

From ground to roof, Glidevale Protect's Construction Division has it covered, offering:

- External breather construction membranes.
- Internal airtightness products & vapour control layers.
- Both of the above with high performance, insulating and reflective options.
- Cavity trays - we offer one of the most comprehensive ranges on the market and are recognised for our expertise in this area.
- Loft access hatches with insulation, fire protection and security options.
- Other building ventilation solutions including wall, window and whole-house ventilation systems.
- STA Assure Gold level accreditation for the structural timber industry. This is in addition to Glidevale Protect's other quality hallmarks, management systems and external product performance certification.

**ROOFING SOLUTIONS**

**ABOUT GLIDEVALE PROTECT**

**Specialists in ventilation solutions, condensation control and energy efficiency across the built environment.**

A UK producer with almost 40 years of innovation, experience and technical expertise.

Glidevale Protect offers a comprehensive range of building products from its Roofing and Construction Divisions. The roofing range includes roofing underlays, roofing ventilation and roofing accessories. The construction range includes construction and airtightness membranes, cavity trays, loft hatches and other solutions for building ventilation.

Within the Roofing Division, solutions are offered for pitched and flat roof applications for both new build and refurbishment schemes.

Glidevale Protect products are tried and tested for both traditional and offsite construction.

**ISO 9001** — Glidevale Protect products are designed and developed specifically for the UK and Irish market requirements under this standard.

**ISO 45001 & ISO 14001** — Glidevale Protect is accredited to this international health and safety standard and environmental standard.

**TECHNICAL SUPPORT**

Get support from Glidevale Protect's Technical team on existing projects and new specifications, including:

- Design guidance
- Building regulations advice
- U-value calculations
- Condensation risk analysis, product specification details and clauses
- Estimates & structured quotes
- Site take-offs
- Plot by plot delivery
- Site visits
- Tool box talks



**Contact our Technical team:**  
**T: +44 (0)161 905 5700**  
**E: technical@glidevaleprotect.com**

**Stockist's stamp**



2 Brooklands Road, Sale, Cheshire M33 3SS  
T: +44 (0)161 905 5700 F: +44 (0)161 905 2085 E: info@glidevaleprotect.com  
W: glidevaleprotect.com



Glidevale Protect maintains a policy of continuous development and reserves the right to amend product specifications without notice.